



RFS7000

Enabling a secure and resilient Wireless Enterprise for campus, data center and large deployments



FEATURES

Wi-NG architecture — delivering a unified voice, data and RF management platform

Improve business process flow with one platform for wireless voice, video, data and multiple RF technologies on one platform — such as RFID, Wi-Fi (including 802.11n) and future technologies such as Wi-MAX; rich enterprise-class functionality includes seamless roaming across L2/L3 deployments, resilient failover capabilities, comprehensive security, toll-quality voice and other value-added services, such as multi-RF locationing

Adaptive AP: extending the enterprise

Enables centralized management of mesh access points at remote sites including automatic firmware upgrades; provides site survivability for remote locations with 802.11a/b/g/n networks for unparalleled resiliency

High performance Wireless LAN Switch for the demanding enterprise networks

Designed for large scale, high bandwidth deployments, the RFS7000 Wireless LAN (WLAN) Switch provides highly scalable enterprise mobility in large enterprises, campuses and data centers. Motorola's landmark Wireless Next Generation (Wi-NG) operating system enables a comprehensive set of services, offering unmatched security, resiliency and mobility for high performance 802.11n networks. Easy to deploy and manage, the RFS7000 provides a converged platform to deliver multimedia applications (data, voice, video), wireless networking, and value-added mobility services such as secure guest access and locationing for multi-RF networks (Wi-Fi, RFID and UWB).

Cost-effective centralized management

The RFS7000 provides the tools you need to simplify and minimize the costs associated with day-to-day management of mobility solutions. The Wi-NG architecture provides unified management of network hardware, software configuration, and network policies, complete with built-in process monitors and troubleshooting tools. A valuable modular software offering, the RF Management Suite, provides centralized control over the entire lifecycle of your Motorola mobility solution — allowing you to easily design, deploy, monitor and secure your wireless network.

Raising the bar on enterprise-class performance

The RFS7000 offers a multicore multithreaded CPU-based Wi-NG architecture, intended for large scale, high bandwidth enterprise deployments. It easily handles from 8,000 to 96,000 mobile devices and 256 to 3,000 802.11 dual-radio a/b/g/n access ports or Adaptive APs (AP-5131 a/b/g or AP-7131a/b/g/n).

The RFS7000 delivers the investment protection enterprises require: Motorola's patent pending clustering technology provides a 12X capacity increase, and Smart licensing enables a build-as-you-grow expansion of your network.

Gap-free security for the Wireless Enterprise

Comprehensive network security features keep wireless transmissions secure and provide constant compliance for HIPAA and PCI. The wide range of industry standards-based security mechanisms enable enterprises to create a layered security strategy to meet the needs of virtually any application. This complete solution includes an integrated IPsec VPN gateway, AAA Radius Server, and Firewall with Stateful Packet Inspection capability and Secure Guest Access with a captive web portal, reducing the need to purchase and manage additional infrastructure. Additional security features include MAC-based authentication, comprehensive IDS/IPS, Anomaly Analysis and more.

Enabling toll-quality voice for the Wireless Enterprise

Support for VoWLAN provides cost-effective voice services throughout the wireless enterprise, enabling push-to-talk and more for employees inside the four walls as well as in outside areas such as the yard. The rich feature set provides granular control over the many wireless networking functions required to deliver high performance persistent clear connections with toll-quality voice. Quality of Service (QoS) ensures superior performance for voice and video services. WMM Admission Control, including TSPEC, ensures dedicated bandwidth for voice calls as well as better control over active voice calls. Layer 3 hyper-fast secure roaming combines with readiness for external fixed-mobile convergence (FMC) solutions, enabling seamless voice services with true mobility across the enterprise.

SMART RF Management

Next generation self-healing: enables the WLAN to automatically and intelligently adapt to changes in the RF environment to eliminate unforeseen gaps in coverage

Comprehensive layered security


Exceptional level of data and network protection without sacrificing fast roaming, including: WPA2-CCMP (with 802.11i fast roaming options); Stateful Firewall; integrated RADIUS Server; IPSec VPN Gateway; Secure Guest Access Provisioning; and 24x7 dedicated security via Motorola's Wireless IPS, providing the advanced technology required to detect any rogue network, including 802.11n

Enhanced End-to-End Quality of Service (QoS)

Enhances voice and video capabilities; prioritizes network traffic to minimize latency and provide optimal quality of experience; Wi-Fi Multimedia Extensions (WMM-Power Save) enhances multimedia application support and improves battery life and capacity; network optimization through granular bandwidth contracts based on bandwidth utilization network load and number of users for different applications being used, in different locations; TSPEC Admission Control ensures ample bandwidth and a superior user experience for VoIP calls

RFS7000 network architecture

The RFS7000 offers the comprehensive functionality necessary to extend wireless voice and data access inside the largest of enterprises — as well as to remote locations inside and outside the enterprise campus walls.

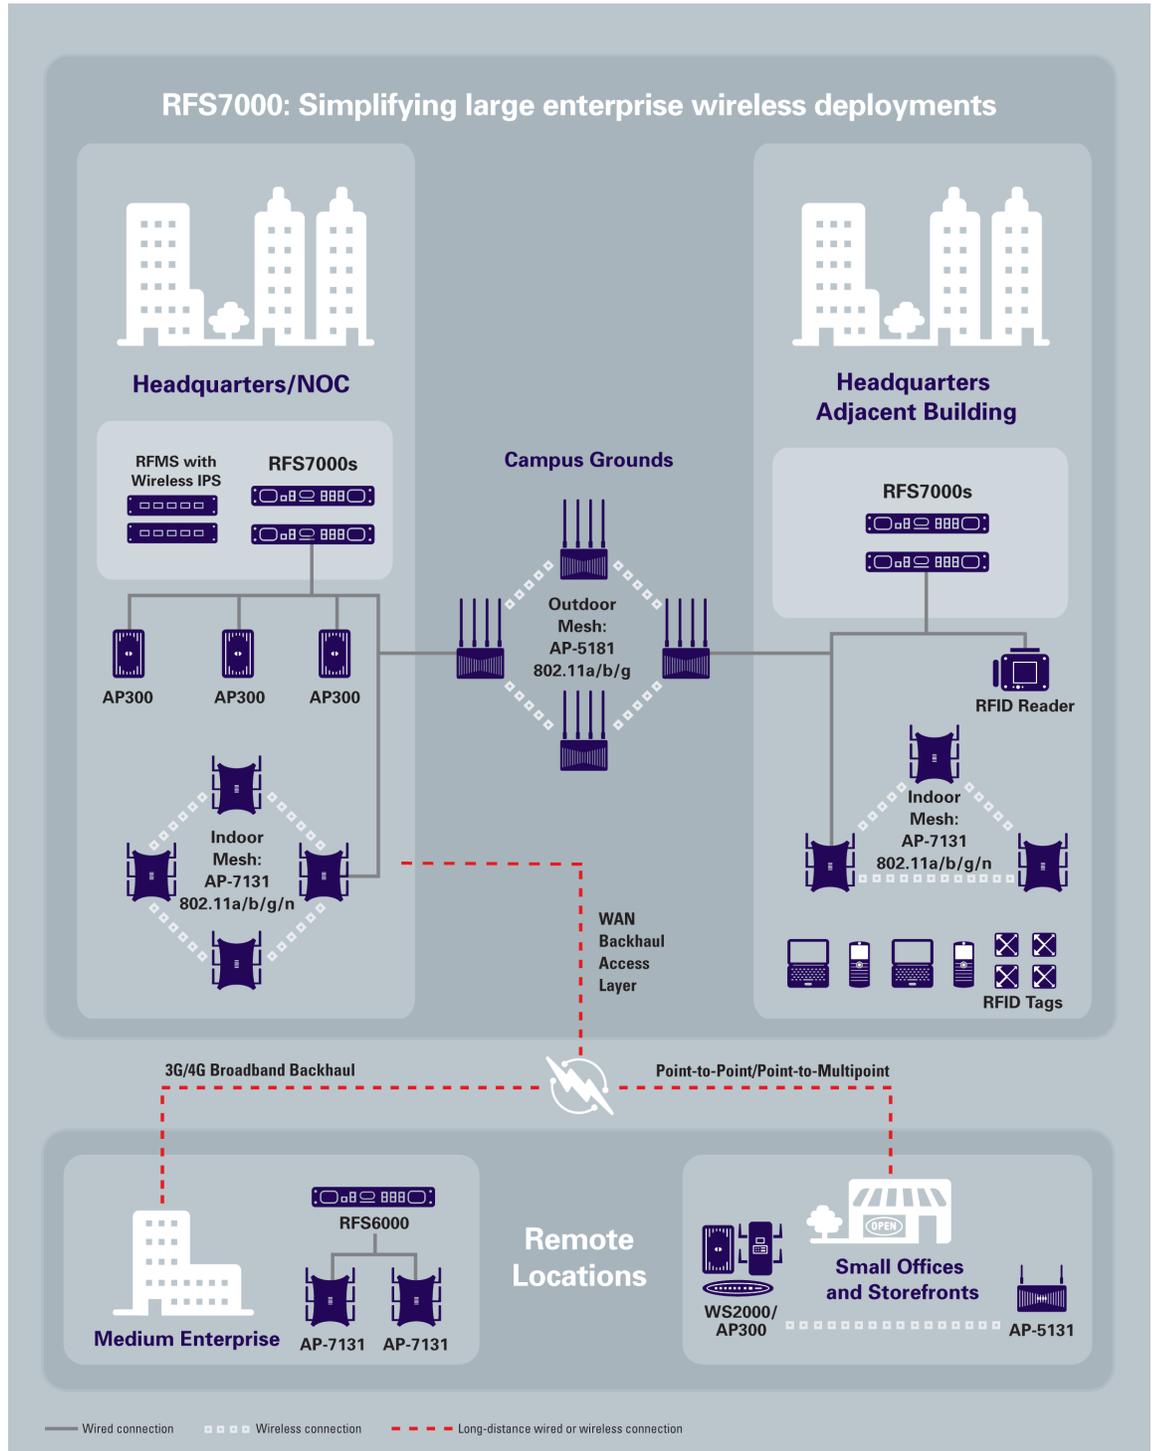

Enabling value-added mobility services

The RFS7000 supports seamless mobile access to multi-RF networks, enabling locationing and simplified real-time asset tracking throughout the network. In addition, the RFS7000 offers unparalleled management flexibility — the user is free to choose between Motorola’s RF Management System, a partner portal or any other enterprise application for central monitoring and visualization. Secure guest access, onboard RADIUS services, granular access, bandwidth control at the client level and automatic load balancing enable highly optimized, flexible and secure Hotspot deployments managed centrally through one console.

Adaptive AP for increased network flexibility — and site survivability

The RFS7000 simplifies and reduces the cost of extending mobility to remote and branch offices as well as telecommuters. Motorola’s Independent Mesh Access Points (AP-51X1 a/b/g and AP-7131 a/b/g/n) can be deployed at remote locations yet centrally managed in the Network Operations Center (NOC) through the RFS7000 (single switch or a cluster for scalability). An IPsec VPN tunnel secures all traffic between the access points and the wireless switch. Remote Site Survivability (RSS) mesh access points deliver secure uninterrupted wireless service — providing unparalleled resiliency that survives a WAN link outage.

Put your RF on autopilot

The latest addition to the Wi-NG architecture is SMART RF Management. This feature takes self-healing to the next level, dramatically reducing network monitoring IT costs by enabling the WLAN to intelligently adapt to the ever-changing RF environment. The ability to dynamically adjust the power and channels on any access port automatically eliminates the gaps in coverage that occur when an AP fails or there is a change in your environment — for example, the introduction of an increased volume of liquid or metal — all without any

physical intervention. The elegant feature protects against under- or over-powering — scenarios that could reduce performance and network availability. And adjustments are completely transparent — there is no impact on voice calls and data sessions in progress — protecting the quality of service and the user experience to ensure user productivity.

Maximize benefits — and minimize costs

All the enterprise class services such as security, voice, performance and resiliency are built into the Wi-NG architecture — the innovative and modular operating system (OS) for the RFS7000. These comprehensive services come at no additional cost and are packaged together to make mobility work — even better.

End-to-end support

As an industry leader in mobility, Motorola offers the experience gained from deploying mobility solutions all over the globe in many of the world’s largest enterprises. Leverage this expertise through Motorola Enterprise Mobility Services, which provides the comprehensive support options you need to deploy and maintain your RFS7000 at peak performance. Motorola recommends protecting your investment with Service from the Start Advance Exchange Support, a multi-year program that provides the next-business-day device replacement you need to keep your business running smoothly and productively. This service also includes Comprehensive Coverage, which covers normal wear and tear, as well as internal and external components damaged through accidental breakage — significantly reducing your unforeseen repair expenses.

For more information, visit us on the web at www.motorola.com/rfs7000 or access our global contact directory at www.motorola.com/enterprisemobility/contactus

Real Time Locationing System (RTLS)

Provides rich locationing services to enable real-time enterprise asset-tracking through support for 802.11, RFID and third party locationing solutions — including industry leaders AeroScout, Ekahau, and Newbury Networks. Standards-based support for: EPC Global ALE interface for processing and filtering data from all active and passive tags; and EPC Global LLRP interface for passive RFID tag support

Clustering and failover features

Supports multiple levels of redundancy and failover capabilities to ensure high availability networks; multi-platform license sharing enables deployment of cost-effective networks

True mobility

Virtual AP provides better control of broadcast traffic and enables multiple mobile and wireless applications with quality of service when network is congested; Pre-emptive Roaming ensures Motorola mobile devices roam before signal quality degrades; Power Save Protocol optimizes battery life

RFS7000 Specifications

Packet Forwarding

802.1D-1999 Ethernet bridging; 802.11-802.3 bridging; 802.1Q VLAN tagging and trunking; proxy ARP; IP packet steering-redirection

Wireless Networking

Wireless LAN: Supports 256 WLANs; multi-ESS/BSSID traffic segmentation; VLAN to ESSID mapping; auto assignment of VLANs (on RADIUS authentication); power save protocol polling; pre-emptive roaming; VLAN Pooling and dynamic VLAN adjustment

Bandwidth management: Congestion control per WLAN; per user based on user count or bandwidth utilization; dynamic load balancing of AP300s in a cluster

Access ports: Supports 1-256 “thin” access ports; automatic access port adoption with ACLs; access port load balancing; direct sequence access point-to-access port conversion; supports AP300s and AP100

Adaptive AP: Supports 1-256 adoption of the Independent Motorola AP-51X1 802.11a/b/g and AP-7131a/b/g/n Access Points in Adaptive Mode for remote site and branch office solutions

Layer 2 or Layer 3 deployment of Access Ports and Adaptive AP AP-51X1 802.11a/b/g and AP-7131 802.11a/b/g/n Access Points

IPv6 client support

Layer 3 Mobility (Inter-Subnet Roaming)

Continued on back

SPECIFICATION SHEET

RFS7000

Enabling a secure and resilient Wireless Enterprise for campus, data center and large deployments

Supported Access Ports and Access Points: AP300 (802.11a/b/g); L2 and L3 deployments with static IP support; AP-51X1 802.11a/b/g Adaptive AP mode and AP-7131 802.11a/b/g/n Adaptive Mode Access Points; Legacy AP support — AP100 and AP-4131 L2 deployments only

Radio frequency automatic channel select (ACS); Transmit power control management (TPC); Country code-based RF configuration; 802.11b, 802.11g, 802.11a, and 802.11n

Network Security

Layer 3 Stateful Inspection Firewall

Access Control Lists (ACLs): L2/L3/L4 ACLs

Wireless IDS/IPS: Multi-mode rogue AP detection, Rogue AP Containment, 802.11n Rogue Detection, Ad-Hoc Network Detection, client blacklisting, excessive authentication/association; excessive probes; excessive disassociation/deauthentication; excessive decryption errors; excessive authentication failures; excessive 802.11 replay; excessive crypto IV failures (TKIP/CCMP replay)

WIPS sensor conversion: Supported on the Adaptive AP-5131 and AP300

Anomaly Analysis: Source Media Access Control (MAC) = Dest MAC; Illegal frame sizes; Source MAC is multicast; TKIP countermeasures; all zero addresses

Authentication: Access Control Lists (ACLs); pre-shared keys (PSK); 802.1x/EAP—transport layer security (TLS), tunneled transport layer security (TTLS), protected EAP (PEAP); Kerberos Integrated AAA/RADIUS Server with native support for EAP-TTLS, EAP-PEAP (includes a built in user name/password database; supports LDAP), and EAP-SIM

Transport encryption: WEP 40/128 (RC4), KeyGuard, WPA—TKIP, WPA2-CCMP (AES), WPA2-TKIP

IPSec VPN gateway: Supports DES, 3DES and AES-128 and AES-256 encryption; supports site-to-site and client-to-site VPN capabilities

Secure guest access (Hotspot provisioning): Local Web based authentication; URL redirection for user login; customizable login/welcome pages; support for external authentication/billing systems

Wireless RADIUS Support (Standard and Motorola Vendor Specific Attributes): User Based VLANs (Standard) MAC Based Authentication (Standard) User Based QoS (Motorola VSA) Location Based Authentication (Motorola VSA) Allowed ESSIDs (Motorola VSA)

NAC support with third party systems from Microsoft and Symantec

Real Time Locationing System(RTLS)

RSSI based triangulation for Wi-Fi assets

Tags supported: Ekahau, Aeroscout, Newbury, Gen 2 Tags

RFID support: Compliant with LLRP protocol. Built-in support for the following Motorola RFID readers: fixed (XR440, XR450, XR480); mobile (RD5000); and handheld (MC9090-G RFID)

Optimized Wireless QoS

RF priority: 802.11 traffic prioritization and precedence

Wi-Fi Multimedia extensions: WMM-power save with TSPEC Admission Control; WMM U-APSD

Classification and marking: Layer 1-4 packet classification; 802.1p VLAN priority; DiffServ/TOS

System Resiliency and Redundancy

Active:Standby; Active:Active and N+1 redundancy with access port and MU load balancing; self healing; critical resource monitoring

SMART RF: Network optimization to ensure user quality of experience at all times by dynamic adjustments to channel and power (on detection of RF interference or loss of RF coverage/neighbor recovery)

Dual Firmware bank supports Image Failover capability

Management

Command line interface (serial, telnet, SSH); secure Web-based GUI (SSL) for the wireless switch and the cluster; SNMP v1/v2/v3; SNMP traps—40+ user configurable options; Syslog; TFTP Client; secure network time protocol (SNTP); text-based switch configuration files; DHCP (client/server/relay), switch auto-configuration and firmware updates with DHCP options; multiple user roles (for switch access); MIBs (MIB-II, Etherstats, wireless switch specific monitoring and configuration); Email notifications for critical alarms; MU naming capability

Physical Characteristics

Form factor: 1U Rack Mount

Dimensions: 1.75 in. H x 17.32 in. W x 15.39 in. D
44.45 mm H x 440 mm W x 390.8 mm D

Weight: 13.5 lbs./6.12 kg

Physical interfaces: 4 10/100/1000 Cu/SFP Ethernet interfaces, 1 10/100 OOB port, 1 CF card slot, 2 USB slots, 1 serial port (RJ45 style)

MTBF: >65,000 Hours

Power Requirements

AC input voltage: 90 – 264 VAC 50/60Hz

Max AC input current: 6A@115 VAC, 3A@230 VAC

Input frequency: 47 Hz to 63 Hz

User Environment

Operating temperature: 32° F to 104° F /0° C to 40° C

Storage temperature: -40° F to 158° F/-40° C to 70° C

Operating humidity: 5% to 85% (w/o condensation)

Storage humidity: 5% to 85% (w/o condensation)

Regulatory

Product safety: UL / cUL 60950-1, IEC / EN60950-1

EMC compliance: FCC (USA), Industry Canada, CE (Europe), VCCI (Japan), C-Tick (Australia/New Zealand)

Part Numbers

RFS-7010-100R0-WR: Zero Port Wireless Switch

RFS-7010-10030-WR: 64 Port Wireless Switch

RFS-7010-10010-WR: 128 Port Wireless Switch

RFS-7010-10020-WR: 256 Port Wireless Switch

RFS-7010-UC-16-WR: 16 Port Upgrade License Certificate



MOTOROLA

motorola.com

Myynti:
Connect
Services Oy
09-412 6677
www.connect.fi